



SV30 is the light, portable, high performance and simple operated sound velocity sensor. SV30 direct measurement of sound velocity using direct-reading ultrasonic echodetection techniques for 2Mhz sensing components. With the advanced digital signal processing technology, the accuracy of sound velocity measurement is improved to 0.03 m/s.



Features

Advanced digital signal processing technology

High accurate measurement for sound velocity and temperature

Corrosion and pressure resistant 316l stainless steel hull

Simple operation and friendly software


Support multiple data format export

Specification

Survey	
Sound velocity range	1400m/s~1900m/s
Sound velocity resolution	0.001m/s
Measurement accuracy	0.03m/s
Acoustic Frequency	2MHz
Temperature sensor	RT1000
Temperature range	0~50℃
Temperature resolution	0.001℃
Temperature accuracy	0.05℃
Electricity	
Power voltage	9V∼36VDC
Communication	RS232
Communicated rate	9600~115200bps
Physical	
Working depth	50m
Weight	1.5kg
Size	266 mm(L) \times 40 mm(Dia)

Professional Software

Simple operation, support multiple format data export

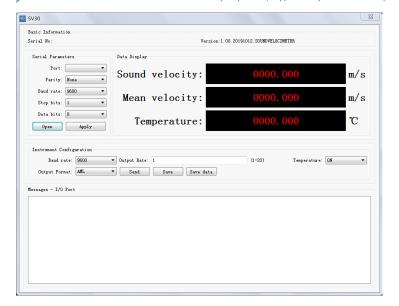

Application

Apply in the sea investigation, hydrographic survey, under water navigation and so on.





NS TECH SURVEY PVT LTD.

Add: B3/H7, BASEMENT, AGGARWAL PLAZA, NETAJI SUBHASH PLACE NEW DELHI-110034 Tel:- 011-41005275 / 9911283856 /9650277697 /9717490601

E-mail: sales@ruideindia.com, www.ruideindia.com /www.nstechconsultant.com

BRANCHES:-**AHEMDABAD BHOPAL HYDERABAD MUMBAI CHENNAI**