

RUIDE

SDE-19



- **Rugged 316L material metal hull, stable IP67 design**
- **Wireless connections: Tablet WIFI connect with echo sounder, bluetooth connect with GNSS receiver.**
- **Professional Android hydrographic survey program, support standard GNSS receiver format**
- **Built-in operated web UI, simple for users' configuration**
- **Optional size transducer, convenient survey experience**



Features


Web UI configuration

The SDE-19 supports WiFi connection for smart device access the built-in Web UI pages, and we can easily configure the parameters of SDE-19, and view the water depth realtime.




Optional survey software


Clients can select our easy used survey software for Windows OS or for Android OS tablet

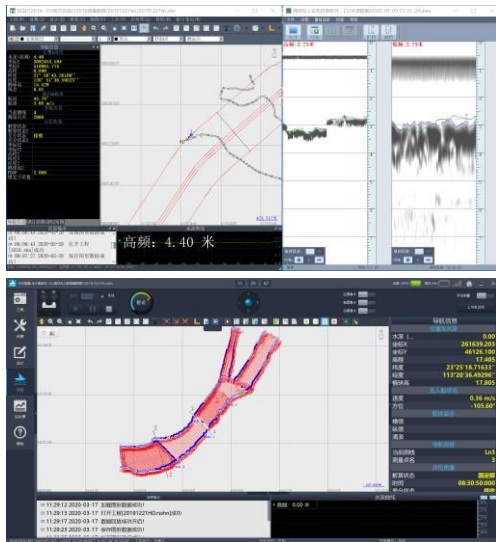

Multiple transducers



Dual frequency transducer



Single frequency transducer 1



Single frequency transducer 2

Specification

	SDE-19S	SDE-19D
Frequency	200k Hz	200k Hz and 20k Hz standard
Measure range	0.3m - 200m	200k Hz: 0.3 - 200m
Beam angle	200k Hz: 7 degree	20k Hz: 0.5 - 600m
Power supply	DC 12V	
Interface	3* RS232, 1* RS485, 1 power supply interface, 1 transducer port and 1 LAN port	
WiFi	Build-in WiFi unit, support webUI login and data transmission	
IP level	IP67	
Operating temperature	-45°C - 60°C	
Hull material	316L stainless steel	
Transducer size	254mm×124mm×45mm	250mm×147mm×110mm
Host size	220mm×210mm×70mm	
Host weight	2.9KG	3.0KG

Application

High-precision water bottom topographic survey in river, lake, or sea.
Also apply in some marine constructed project



NS TECH SURVEY PVT LTD.

Add: B3/H7, BASEMENT, AGGARWAL PLAZA, NETAJI SUBHASH PLACE NEW DELHI-110034

Tel:- 011-41005275 / 9911283856 / 9650277697 / 9717490601

E-mail: sales@ruideindia.com, www.ruideindia.com / www.nstechconsultant.com

BRANCHES:- AHMEDABAD BHOPAL HYDERABAD MUMBAI CHENNAI